

SuperVue®

Perforation pattern:

Approx. 50/50 (50% open)

Perforation size:

0.08 in. (2.0 mm)

Film:

8-mil calendered PVC on a 3-in. core

Standard roll sizes:

54 in. x 25 ft.


54 & 60 in. x 100 & 1000 ft.


Application:

Building wraps, other large-format window graphics

Product code:

CFEABWSV

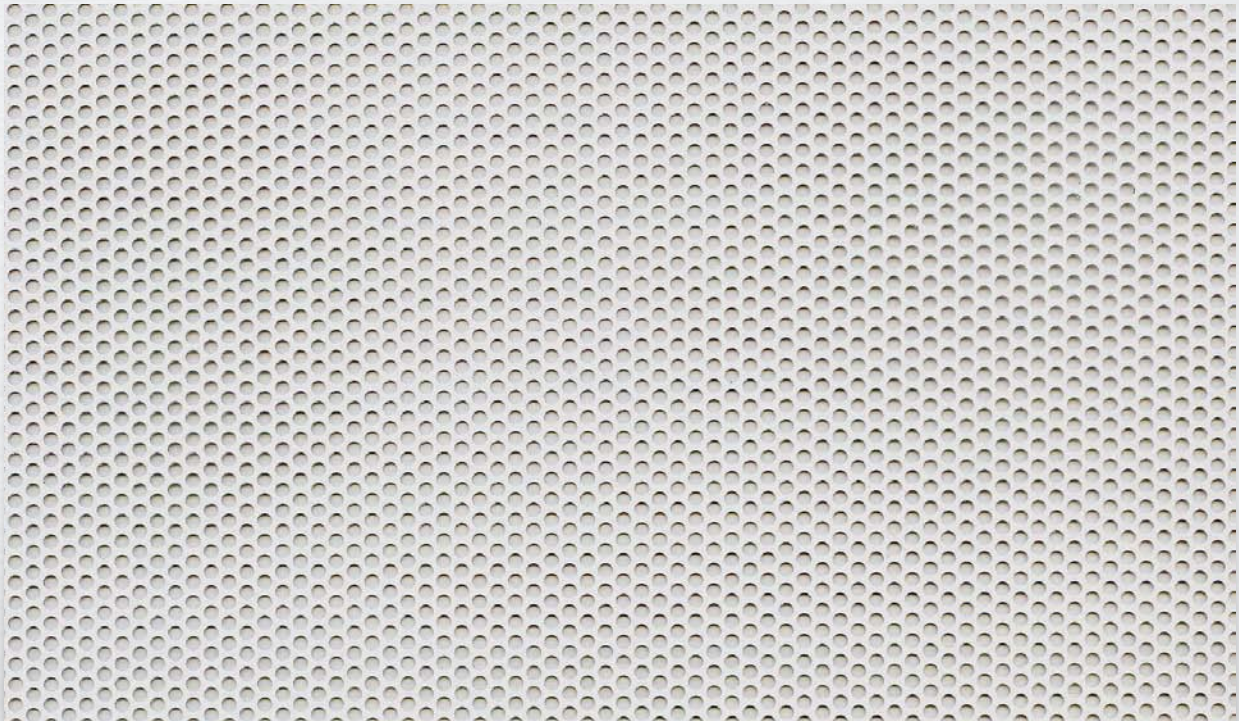



Exterior Adhesive Mount Product Specifications

Product Code: CFEABWSV

8-mil white/black composite PVC with clear removable acrylic pressure-sensitive adhesive and a release liner consisting of clear PET film laminated to perforated paper to absorb ink.

Applications	Windows, glass doors and other transparent surfaces
Composition	White/black PVC laminate with clear pressure-sensitive adhesive coating and a release liner consisting of clear PET film laminated to perforated paper to absorb ink.
Open Area	50% (approx.)
Vinyl Thickness (incl. adhesive)	8 mils (.008 in./203 microns), approx.
Release Liner Thickness	7 mils (.007 in./178 microns), approx.
Adhesive Thickness	1 mil (.001 in./25 microns), approx.
Perforation Diameter	.080 in. (2.0 mm)
Standard Widths/Lengths	54 & 60 in. x 100 & 1000 ft. (1.37 & 1.52 x 30.48 & 304.8 m); 54 in. x 25 ft (1.37 x 7.62 m) Custom sizes available by special order.
Dimensional Stability	Good
Minimum Application Temperature	40° F (4° C)
Service Temperature Range	0° F to 140° F (-17° C to 60° C)
Expected Lifetime Exterior	2 to 3 years. 6 months for clean removal. Adhesion may increase with time.
Water Resistance	Fair. Immersion in water not recommended. If exposed to rain, an optically clear, compatible overlamine can be used to prevent holes from filling with water.
Humidity Resistance	Fair
Solvent Resistance	Good
Storage Stability	1-year shelf life when stored at 70° F (21° C) and 50% relative humidity
Colors Available	White on print side and black on adhesive side.
Printing	Standard vinyl inks recommended. Print image on vinyl side, not on release liner. Compatible with screen printing; inkjet printing using solvent, eco-solvent, mild solvent, latex (with solid paper liner) and UV-cure inks; thermal transfer; electrostatic transfer; and airbrushing.
Application	Apply to clean, dry glass surface. Use mild soap and water, rinse and dry glass well. Do NOT use ammonia, Windex® or other solvent-based glass cleaner prior to application.
Removal	Remove by peeling from surface. Remove any adhesive residue on older installations, if necessary.

Other SuperVue Products

<p>SuperVue with a White PET Liner Code: CFEABWSVWL</p>	<p>Features a patented white PET liner consisting of white PET film laminated to perforated paper to absorb ink and to facilitate sensing of media by printer. Compatible with all printing methods listed above, except latex inks. Custom order.</p>
<p>SuperVue with a Solid Paper Liner Code: CFEABWSVSL</p>	<p>Features an unperforated solid paper liner. Not recommended for use with UV-cure printers. Custom order.</p>
<p>SuperVue Clear Interior Adhesive Mount Film with a Solid Paper Liner Code: CFIACSVSL</p>	<p>Clear 6-mil (.006 in./152.4 micron) interior adhesive mount vinyl film with an unperforated solid paper liner. Designed primarily for screen printing, as film requires printing mirror image with color sequence printed in reverse, followed by the application of a full coat of white ink and then a full coat of black ink. Roll size 54 in. x 100 ft.</p>

CLEAR FOCUS Imaging, Inc. 60 Maxwell Court, Santa Rosa, CA 95401 USA

Tel. (707) 544-7990 • Fax: (707) 544-1886 • E-mail: headoffice@clearfocus.com • Web: www.clearfocus.com

USA toll-free (800) 307-7990